DAIKIN

Perfecting the Air

# Split Systems

## Heating and cooling solutions




MOST RELIABLE Finder AWARDS 2024-25 AIR CONDITIONER

Voted by Australians Winner TRUSTED BRAND 2026 Reader's Digest Air Conditioners

Voted by Australians Winner TRUSTED BRAND 2025 Reader's Digest Air Conditioner

Winner TRUSTED BRAND 2024 Reader's Digest Air Conditioner

Winner TRUSTED BRAND 2023 Reader's Digest Air Conditioner

PCSPAU0926

# Perfecting the Air

Every day we breathe in 10,000 litres of air. It nourishes us. Enriches us. A deep breath of clean air is exactly what nature intended. It's amazing that something we can't see can make such a difference to our health and well-being – and it's why we believe every breath should be 'perfect'.

At Daikin, we've been 'perfecting the air' for over 50 years to make your home a calm and comfortable place – for you and your family.

As 'Air Specialists', Daikin is driven to improve all aspects of indoor air quality - from temperature and humidity, to flow and cleanliness.



# Contents


| | |
|---|---|
| Indoor Air Quality and Health | 4 |
| Market-leading Streamer Technology | 5 |
| Comfort Reinvented | 6 |
| Zoned Energy Rating Label | 8 |
| Product Overview | 10 |
| Zena | 12 |
| Alira X | 14 |
| Cora | 16 |
| FTXF | 18 |
| XL Premium | 19 |
| XL | 20 |
| Floor Standing | 22 |
| Mobile Controller | 24 |
| Sensitive Choice & Trusted Brand | 25 |
| Why Choose a Daikin Specialist Dealer? | 26 |
| Product Specifications | 27 |
| Features Checklist | 34 |

# Indoor Air Quality and Health


Did you know that Australians spend around 90% of their time indoors? While we're all very aware of what affects outdoor air quality, we don't often consider what our indoor air quality is like and how it could impact the health of our family.

The air inside any home contains a range of pollutants and allergens that can contribute to poor indoor air quality, leading to potentially serious health problems for occupants.

At Daikin, we're dedicated to delivering products and technologies that not only create a comfortable living environment, but also a healthy environment. A range of our products features innovative technology that is designed to greatly reduce the presence of contaminants in the home so you can rest easy knowing your indoor air quality is at an optimum level.

## Common household pollutants

### Substances that can be controlled/broken down


Mould


Pollen


Allergens such as dust mite droppings and remains


Odours


Formaldehyde



Diesel particulate matter


NOx


Dust


Yellow sand

### Substances that can be trapped

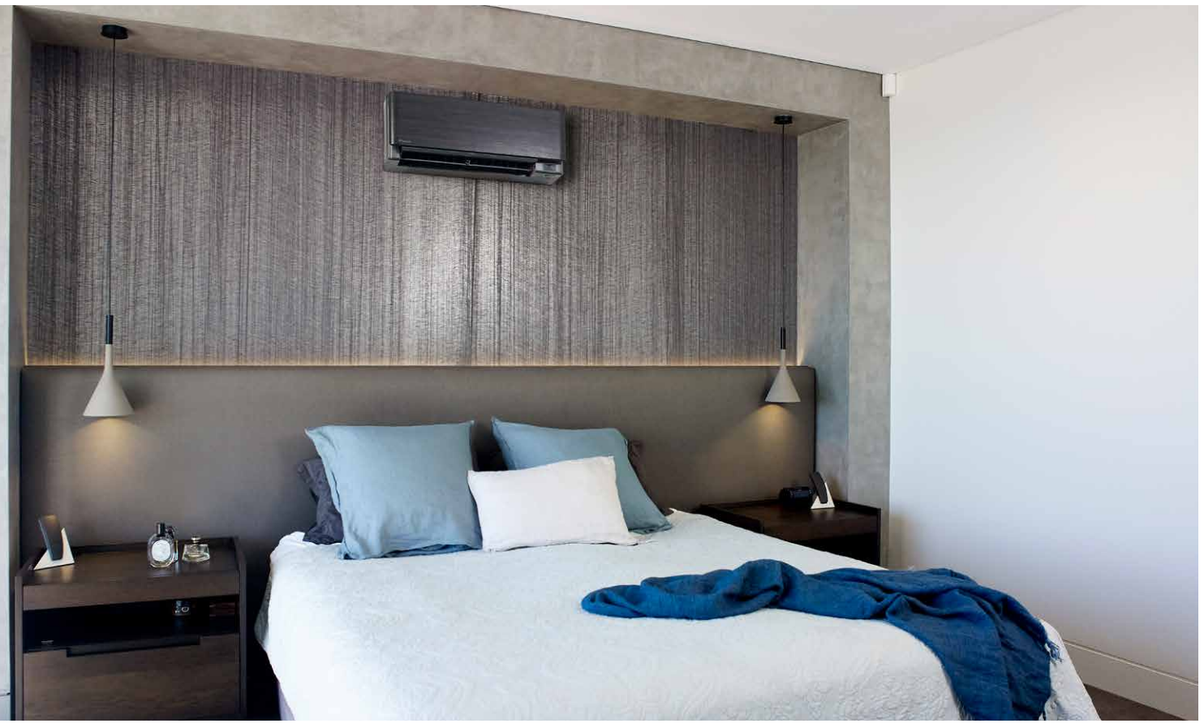



# Market-leading Streamer Technology

The secret to high performance air purification is Daikin's Streamer Technology. This innovative technology, available in Daikin Air Purifiers and select Daikin Split System models, features a high-power plasma discharge that generates high-speed electrons to decompose harmful substances. This powerful oxidative decomposition process continuously removes odours, bacteria and indoor air pollutants such as formaldehyde for superior air purification.


Compared to standard plasma discharge, the speed of oxidative decomposition is over 1000 times greater with the same electrical power!




Streamer emits high-speed electrons.



The electrons collide and combine with nitrogen and oxygen in the air to form four kinds of elements with powerful oxidative decomposition capabilities.


These elements break down unwanted substances.

## How effective is Daikin Streamer Technology?

**Eliminates Pollen**
More than 99.6%[1] in 2 hours

**Eliminates Mould**
More than 99.9%[2] in 24 hours


**Eliminates Allergens**
More than 99.61%[1] in 24 hours

[1] Verified at Wakayama Medical University with the following test condition: Irradiated allergens with Streamer & checked decomposition of allergen proteins by either the ELISA method, electrophoresis or electron microscopy.
[2] Verified at Japan Food Research Laboratories using antibacterial test/mould elimination test (test number: 204041635-001).

# Comfort Reinvented


For over 100 years, Daikin has invested heavily in Research and Development to deliver more effective climate control for you and your family. Daikin technologies help make Daikin air conditioners energy efficient, powerful, reliable and easy to use.

Here are some examples of the innovative technology you can find in your Daikin split system.

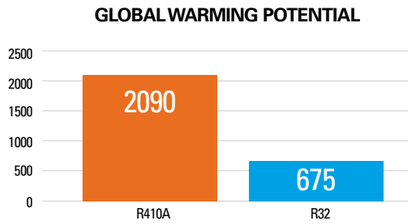


## R32 refrigerant

All Daikin wall mounted split systems use R32 refrigerant. With a lower global warming potential and a higher refrigeration potential than refrigerants such as R410A, R32 systems can deliver more efficient cooling and heating with less risk of harm to the environment.

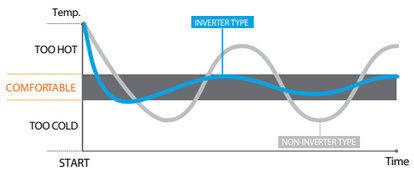


## Inverter technology

An inverter system works like the accelerator of a car, gently increasing or decreasing power - helping reach the desired temperature more quickly, and steadily maintain it without fluctuations. That means uninterrupted comfort and significant savings on running costs.



Neodymium Magnet 10x Stronger  Ferrite Magnet

## Reluctance DC motor

Our outdoor units incorporate Daikin's Reluctance DC motors. These motors which drive our compressors, use the magnetic torque of neodymium magnets in conjunction with reluctance torque, which can boost efficiency by up to 40% more than conventional motors.



## Gecko-resistant electrical box

Alira X, Cora & FTXF outdoor units* feature IPX4 rated electrical box with 2.8mm diameter cooling perforations to help protect electrical components from wildlife.




## Enhanced reliability

Built for the harsh Australian conditions, Alira X, Cora & FTXF outdoor units are designed to enable continuous cooling in ambient temperatures up to 50ºC.

*Excludes Alira X 71 Class Model






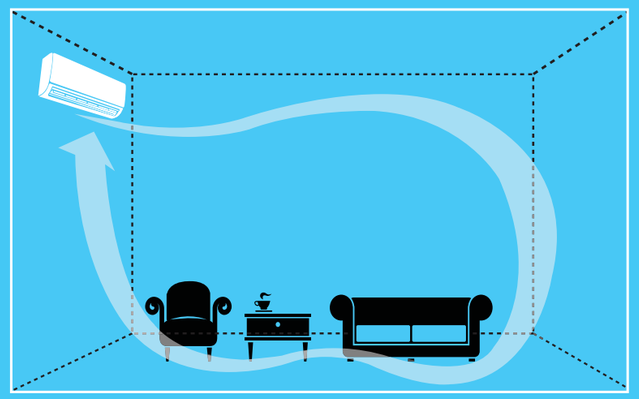

## COANDA AIRFLOW TECHNOLOGY

Our wall mounted indoor units feature an advanced louvre design for streaming air upwards along the ceiling and creating a circulatory air motion in the occupied space. This ensures rapid cooling of the area, even temperature distribution and improved comfort levels.

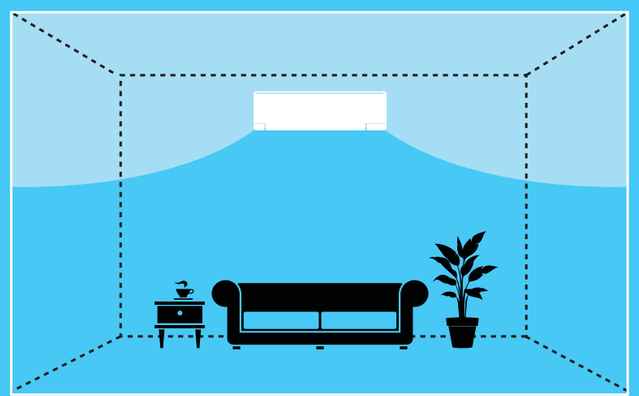

## INTELLIGENT EYE SENSOR

Each indoor wall mounted model^ is fitted with Daikin's trademark Intelligent Eye human sensor. This sensor cleverly switches the unit into energy saving mode when the room is unoccupied.

Automatically saves energy when no one is in the room.

^Only applicable to Alira X, Zena, Cora, XL Premium and XL models




# Zoned Energy Rating Label


In simple terms, the Zoned Energy Rating Label (ZERL) enables you to compare the performance of different air conditioners in a number of ways. These include capacity output, energy efficiency as well as sound levels.

To understand the energy efficiency of a product, the star rating system explains this simply with more stars signifying a more efficient product up to a maximum of ten possible stars.

With Australia's considerable geographic and climatic diversity, the same product installed in Darwin will perform differently further south in Sydney or Melbourne.

As a result, the rating system divides the continent into three distinct climate zones (hot, average, and cold), which allows you to easily identify and compare air conditioners within the climatic zone you live in. The more stars, the more efficient the air conditioner will be.



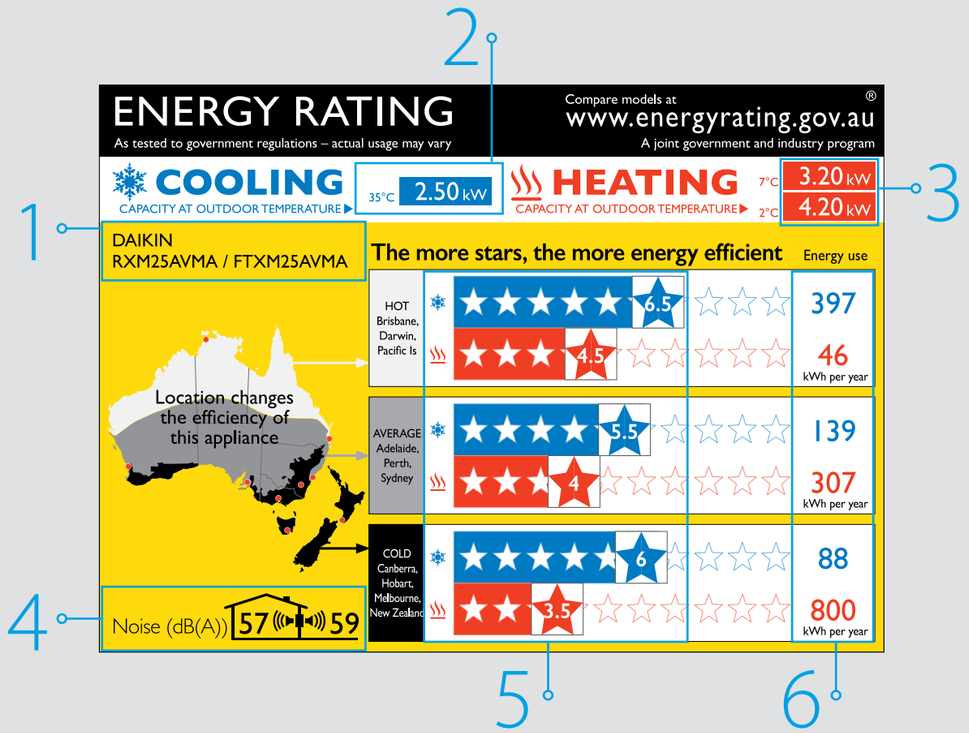


## How to read the label

1. **Brand & model**
   This is the brand and model number of the air conditioner. Use this to ensure you are looking at the right information for your desired model.

2. **Cooling capacity**
   This is the available cooling capacity (kW) of the air conditioner when at an indoor temperature of 27°C & outdoor temperature of 35°C (T1)*.

3. **Heating capacity**
   This is the available heating capacity (kW) of the air conditioner when at an indoor temperature of 20°C & outdoor temperature of 7°C (H1) or 2°C (H2)*.

4. **Sound levels**
   The values indicate the sound power level^ of the indoor unit and the outdoor unit. Lower numbers reflect quieter operation.

5. **Star ratings**
   The stars show you how efficient the air conditioner will perform in each of the three climate zones. The more stars, the more efficient.

6. **Energy usage**
   This tells you the energy usage of the air conditioner per year for cooling & heating. The lower the kWh used, the lower the running cost (multiply by your electricity tariff for estimated running cost).

*The capacity is determined under conditions T1 (cooling), H1 & H2 (heating) of AS/NZS 3823.1.1
^Sound power is the total acoustic energy emitted and is measured under conditions T1 (cooling) of AS/NZS 3823.1.1

# Product Overview

## LEGEND

- Uses R32 refrigerant which has a lower 'Global Warming Potential' Factor than R410A
- Approved by the Sensitive Choice® program from the National Asthma Council Australia
- Optional Wi-Fi available
- Built-in Wi-Fi
- Built-in Streamer Technology for air purification
- **ZERL** (Residential) Refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

## Zena

### 2.5kW to 6.0kW (8 models)

Stylish designer model engineered with the latest technology and built-in Wi-Fi capability.

### Key features

- Ultra compact design
- Streamer Technology
- Intelligent Eye
- Grid eye sensor
- Vertical airflow
- Built-in Wi-Fi

White Hair Line

Black Wood



| STAR RATING | CLASS | 25 | 35 | 50 | 60 |
|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 4/3.5/3.5 ★ | 3.5/3.5/3.5 ★ | 3.5/3/3 ★ | 2.5/2.5/2.5 ★ |
| | HEAT | 3/3/2.5 ★ | 3/2.5/2.5 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ |

## Alira X

### 2.2kW to 7.1kW (7 models)

Alira X takes comfort to the next level, delivering whisper quiet heating and cooling, leading energy efficiency, built-in Wi-Fi and advanced indoor air quality with Streamer Technology.

### Key features

- Heat boost technology
- Long time heating
- Intelligent Eye
- Streamer Technology
- Mould-proof operation[1]
- Built-in Wi-Fi
- Cooling operations up to 50°C ambient




| STAR RATING | CLASS | 20 | 25 | 35 | 46 | 50 | 60 | 71 |
|---|---|---|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 6.5/5.5/6 ★ | 6.5/5.5/6 ★ | 5.5/5/5.5 ★ | 4.5/4/4.5 ★ | 5.5/5/5.5 ★ | 4.5/4.5/5 ★ | 4/3.5/3.5 ★ |
| | HEAT | 4.5/4/3.5 ★ | 4.5/4/3.5 ★ | 4.5/3.5/3 ★ | 4/3.5/3 ★ | 4/3.5/3 ★ | 4/3/2.5 ★ | 4/3/2.5 ★ |

## Cora

### 2.0kW to 7.1kW (7 models)

Delivered in understated confidence, the Cora series comes fully featured, and now with built-in Wi-Fi controls.

### Key features

- Intelligent Eye
- Mould-proof operation[1]
- Enzyme blue deodorising air purification filter
- Built-in Wi-Fi
- Cooling operations up to 50°C ambient




| STAR RATING | CLASS | 20 | 25 | 35 | 46 | 50 | 60 | 71 |
|---|---|---|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 5.5/5/5 ★ | 6/5.5/6 ★ | 5.5/4.5/5 ★ | 4/3.5/4 ★ | 5/4.5/5 ★ | 4/4/4 ★ | 3.5/3/3.5 ★ |
| | HEAT | 4/3.5/3 ★ | 4/3.5/3 ★ | 4/3.5/3 ★ | 3/2.5/2.5 ★ | 3.5/3/2.5 ★ | 3.5/3/2.5 ★ | 3/2.5/2 ★ |



## FTXF

### 2.0kW to 8.0kW (8 models)

Delivering climate control with a compact footprint and whisper quiet operation for everyday comfort.

### Key features

- Compact form factor
- Mould-proof operation[1]
- Cooling operations up to 50°C ambient




| STAR RATING | CLASS | 20 | 25 | 35 | 46 | 50 | 60 | 71 | 80 |
|---|---|---|---|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 4/3.5/3.5 ★ | 4.5/4/4.5 ★ | 4/3.5/3.5 ★ | 3.5/3.5/3.5 ★ | 3.5/3/3.5 ★ | 3.5/3.5/3.5 ★ | 3/3/3.5 ★ | 3/3/3 ★ |
| | HEAT | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/1.5 ★ | 2.5/2/1.5 ★ |

## XL Premium

### 8.5kW to 9.5kW (2 models)

Powerful performance and premium features meet sophisticated design to deliver ultimate comfort for open plan living.

### Key features

- Intelligent Eye
- Enzyme blue deodorising air purification filter
- Streamer Technology
- Built-in Wi-Fi
- Mould-proof operation[1]



| STAR RATING | CLASS | 85 | 95 |
|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 3.5/3/3.5 ★ | 3.5/3/3 ★ |
| | HEAT | 2.5/2/2 ★ | 2.5/2/1.5 ★ |

## XL

### 8.0kW to 9.0kW (2 models)

Combining high capacity performance with a sleek design to ensure comfort in open plan living environments.

### Key features

- Intelligent Eye
- Mould-proof operation[1]
- Enzyme blue deodorising air purification filter



| STAR RATING | CLASS | 80 | 90 |
|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 3.5/3/3.5 ★ | 3/3/3 ★ |
| | HEAT | 2.5/2/1.5 ★ | 2.5/2/1.5 ★ |

## Floor Standing

### 2.5kW to 6.7kW (6 models)

Compact floor standing unit, ideal for colder climates and placement under a window sill or semi-recessed in an unused fireplace.


### Key features

- Heat boost & heat plus mode
- Floor warming mode
- Built-in Wi-Fi
- Streamer Technology
- Enzyme blue deodorising air purification filter
- Mould-proof operation[1]



| STAR RATING | CLASS | 25 | 35 | 45 | 50 | 60 | 71 |
|---|---|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 4.5/3.5/3.5 ★ | 4.5/3.5/3.5 ★ | 3.5/3/3 ★ | 4.5/3.5/3.5 ★ | 3.5/3/3 ★ | 3/3/3 ★ |
| | HEAT | 3.5/3/2.5 ★ | 3/2.5/2.5 ★ | 3/2.5/2 ★ | 3.5/3/2.5 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ |

[1]Does not guarantee the prevention or removal of all mould.

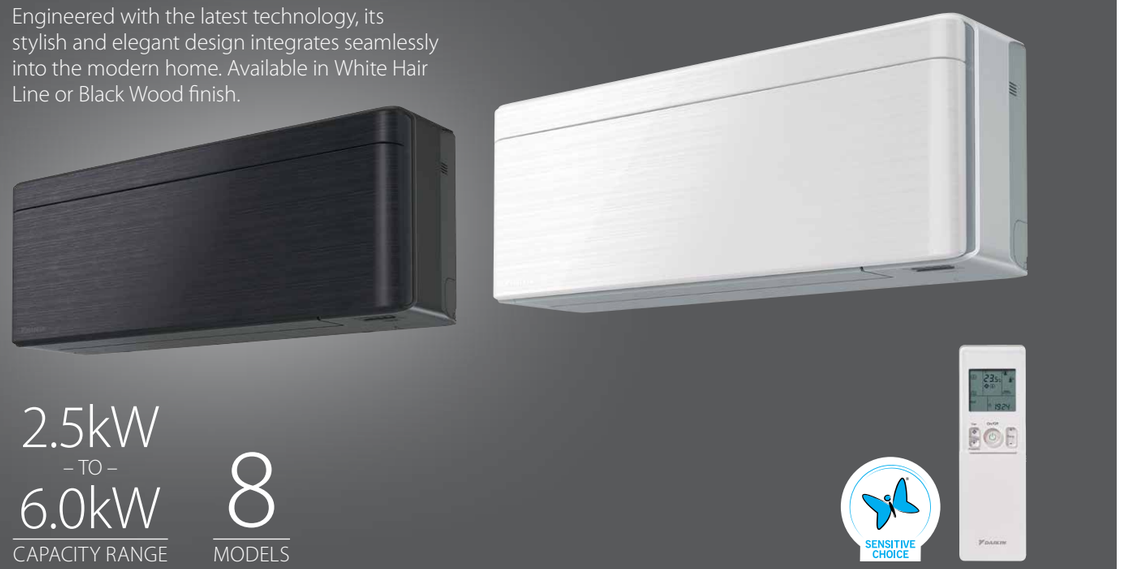


# Zena

## Designed to impress

### R32 refrigerant
R32 is the next generation in refrigerants with 66% lower 'Global Warming Potential Factor' than R410A, providing less risk of harm to the environment.

### Built-in Wi-Fi
With Wi-Fi built in as standard, conveniently control everything with Daikin's Mobile Controller App or Voice Control via your Smart Home Interface.

### Vertical airflow
During heating operation, the discharge louvres stream airflow down the wall and towards the floor for improved temperature distribution and comfort.


### Ultra compact design
The new Zena not only exudes elegance in design, it is packaged in an ultra compact discreet casing size of only 295mm high, 798mm wide and 185mm deep.


### Coanda airflow
Discharge louvres are specially designed to stream air upwards along the ceiling for longer throws and delivering rapid cooling and even temperature distribution in the occupied space.

### Intelligent comfort
Each model is fitted with Daikin's Intelligent Eye that automatically enables energy saving operations when the room is unoccupied for 20 minutes.

**Note:** Please see features checklist on page 34 for full list of features



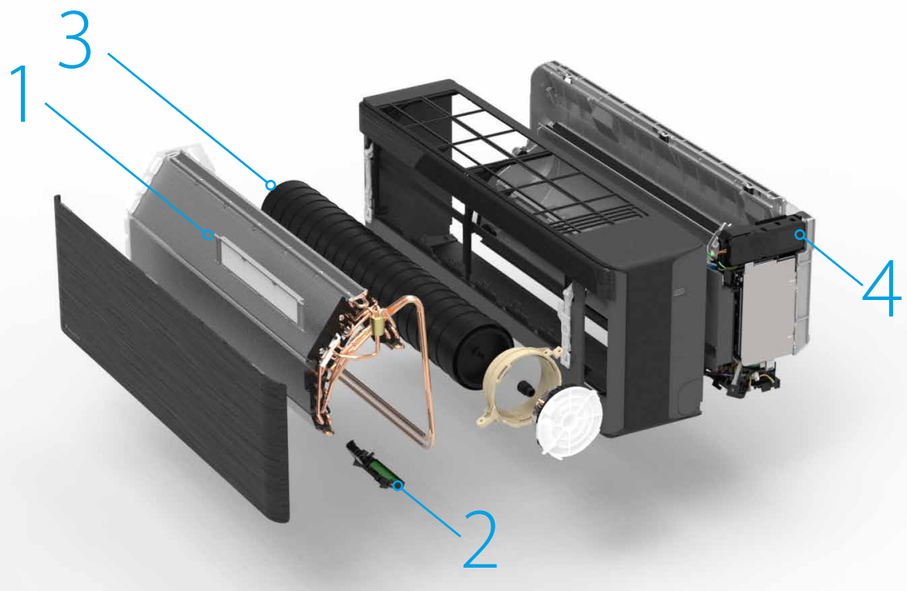

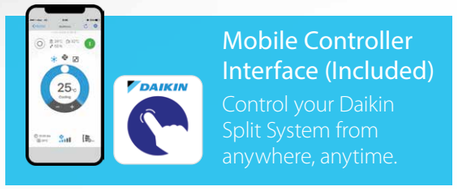
## Technology

### 1. Advanced filter
The titanium apatite deodorising air purification filter traps microscopic particles, decomposes odours and even deactivates bacteria.

### 2. Grid eye sensor
An additional built-in Grid Eye Sensor further monitors the floor temperature during heating and adjusts airflow direction to ensure even room temperature.

### 3. Saw edge fan
Our new 'Saw Edge' aerofoil blade design delivers greater volumes of air quietly whilst retaining Zena's compact form factor.

### 4. Streamer Technology
Discharges high speed electrons generating powerful oxidative decomposition that has been proven to eliminate more than 99.6%[1] of pollen in 2 hours, 99.9% of mould in 24 hours[2] and 99.61% of allergens in 24 hours[1].

STREAMER

## Energy rating

| STAR RATING | CLASS | 25 | 35 | 50 | 60 |
|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 4/3.5/3.5 ★ | 3.5/3.5/3.5 ★ | 3.5/3/3 ★ | 2.5/2.5/2.5 ★ |
| | HEAT | 3/3/2.5 ★ | 3/2.5/2.5 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ |

**ZERL (Residential)** refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

[1] Verified at Wakayama Medical University with the following test condition: Irradiated allergens with Streamer & checked decomposition of allergen proteins by either the ELISA method, electrophoresis or electron microscopy.

[2] Verified at Japan Food Research Laboratories using antibacterial test/mould elimination test (test number: 204041635-001).

Alira X takes comfort to the next level, delivering whisper quiet heating and cooling, leading energy efficiency, built-in Wi-Fi and advanced indoor air quality with Streamer technology.





SENSITIVE CHOICE

2.2kW – TO – 7.1kW
CAPACITY RANGE

7
MODELS

# Alira X

## Superior heating meets exceptional quality

NEW

### Leading energy efficiency
Enjoy year-round comfort with Alira X, designed to deliver powerful performance while being ultra efficient to help reduce energy use in your home.

### Intelligent energy savings
Each model is fitted with Daikin's Intelligent Eye that automatically enables energy saving operations when the room is unoccupied for 20 minutes.

### Built-in Wi-Fi
With Wi-Fi built in as standard, conveniently control everything with Daikin's Mobile Controller App or Voice Control via your Smart Home Interface.

### Higher operation limits
Engineered for Australian extremes, Alira X can operate in ambient temperatures up to 50°C, providing reliable cooling performance even in harsh summer conditions.


### Enhanced heating comfort
Warm up quicker and heat for longer with Heat Boost Technology and Long Time Heating Mode, for powerful heating performance through colder months.

### Mould-proof operation[1]
Activates after cooling or dry operation to help prevent the build up of mould and odour.

### Advanced purification
Each model is fitted with three layers of filtration, prefilter for large particulates, enzyme blue deodorising filter for odours and Daikin's Streamer Technology for powerful oxidative decomposition of pollutants.

[1]Does not guarantee the prevention or removal of all mould. Mould-proof operation function can be toggled (On/Off) via the wireless controller
**Note:** Please see features checklist on page 34 for full list of features.



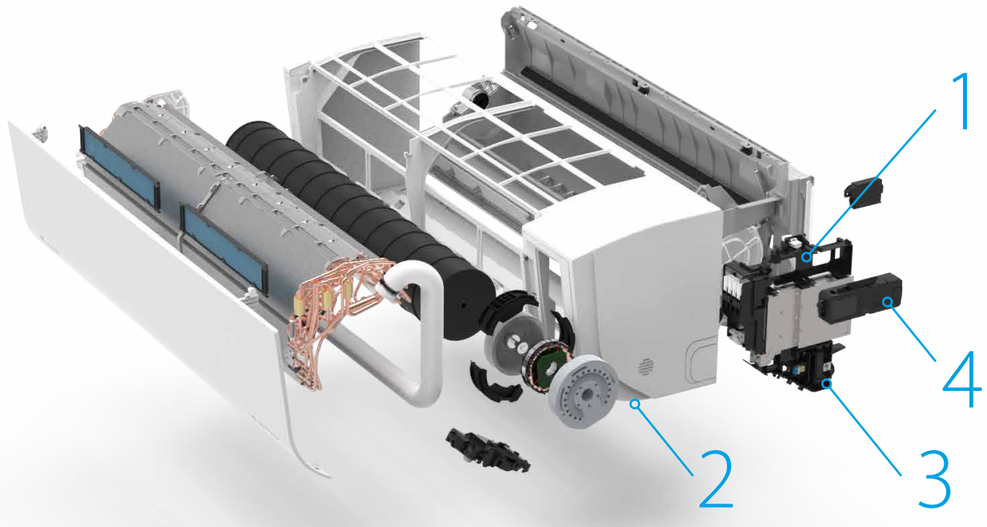




**Mobile Controller Interface (Included)**
Control your Daikin Split System from anywhere, anytime.

## Technology

1. **Heat boost technology**
Heats up your room 25% faster[2] through intelligent capacity, fan speed and airflow direction control.

2. **Redesigned dual louvres**
Large dual louvres with aerodynamic end vanes help reduce turbulence for draught free comfort with longer throw distances of up to 10m (50-71 Class).

3. **Humidity sensor**
Monitors humidity to accurately control supply air temperature for comfortable and effective dehumidification of your room during Program Dry Function operation.

4. **Streamer Technology**
Discharges high speed electrons generating powerful oxidative decomposition that has been proven to eliminate more than 99.6%[3] of pollen in 2 hours, 99.9%[4] of mould in 24 hours and 99.61%[3] of allergens in 24 hours.

STREAMER

## Energy rating

| STAR RATING | CLASS | 20 | 25 | 35 | 46 | 50 | 60 | 71 |
|---|---|---|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 6.5/5.5/6 ★ | 6.5/5.5/6 ★ | 5.5/5/5.5 ★ | 4.5/4/4.5 ★ | 5.5/5/5.5 ★ | 4.5/4.5/5 ★ | 4/3.5/3.5 ★ |
| | HEAT | 4.5/4/3.5 ★ | 4.5/4/3.5 ★ | 4.5/3.5/3 ★ | 4/3.5/3 ★ | 4/3.5/3 ★ | 4/3/2.5 ★ | 4/3/2.5 ★ |

**ZERL (Residential)** refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

[2]Compared to FTXM35Y/RXM35Y under AS/NZS 3823.1.1:2012 conditions.
[3]Verified at Wakayama Medical University with the following test condition: Irradiated allergens with Streamer & checked decomposition of allergen proteins by either the ELISA method, electrophoresis or electron microscopy.
[4]Verified at Japan Food Research Laboratories using antibacterial test/mould elimination test (test number: 204041635-001).

Delivered in understated confidence, featuring whisper quiet operation and premium comfort levels without compromising on style.





SENSITIVE CHOICE

2.0kW – TO – 7.1kW
CAPACITY RANGE

7
MODELS

# Cora

## Understated elegance for year-round comfort

NEW

### Intelligent energy savings
Each model is fitted with Daikin's Intelligent Eye that automatically enables energy saving operations when the room is unoccupied for 20 minutes.

### Inverter powerful operation
Push the POWERFUL button on the remote control and you'll be relieved with a cooling or heating boost for a 20 minute period, even if the unit's already operating at high capacity.

### Mould-proof operation[1]
Activates after cooling or dry operation to help prevent the build up of mould and odour.


### Built-in Wi-Fi
With Wi-Fi built in as standard, conveniently control everything with Daikin's Mobile Controller App or Voice Control via your Smart Home Interface.

### Higher operation limits
Engineered for Australian extremes, Cora can operate in ambient temperatures up to 50°C, providing reliable cooling performance even in harsh summer conditions.

### Air purification
Each model is fitted with an enzyme blue deodorising air purification filter that traps microscopic particles, decomposes odours and even deactivates bacteria.

[1]Does not guarantee the prevention or removal of all mould. Mould-proof operation function can be toggled (On/Off) via the wireless controller
**Note:** Please see features checklist on page 34 for full list of features.



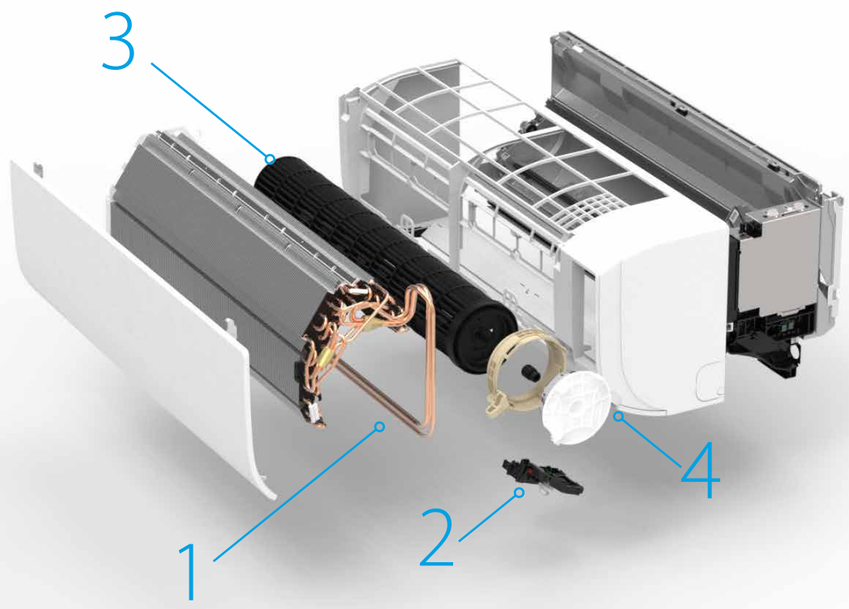




**Mobile Controller Interface (Included)**
Control your Daikin Split System from anywhere, anytime.

## Technology

1. **Redesigned heat exchanger**
Slit type fin design with Ø5mm piping increases heat exchange area for improved capacity output and energy performance.

2. **Intelligent Eye**
The Integrated sensor detects whether a room is occupied and can automatically adjust room temperatures ±2°C to save energy.

3. **Cross flow fan**
Large diameter rotor with aerofoil blade design delivers larger volumes of air more quietly than ever before.

4. **New ODM motor**
Compact 10 pole DC outer diameter rotor motor delivers higher torque more efficiently.

## Energy rating

| STAR RATING | CLASS | 20 | 25 | 35 | 46 | 50 | 60 | 71 |
|---|---|---|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 5.5/5/5 ★ | 6/5.5/6 ★ | 5.5/4.5/5 ★ | 4/3.5/4 ★ | 5/4.5/5 ★ | 4/4/4 ★ | 3.5/3/3.5 ★ |
| | HEAT | 4/3.5/3 ★ | 4/3.5/3 ★ | 4/3.5/3 ★ | 3/2.5/2.5 ★ | 3.5/3/2.5 ★ | 3.5/3/2.5 ★ | 3/2.5/2 ★ |

**ZERL (Residential)** refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Delivers climate control with a compact footprint and whisper quiet operation for everyday comfort.



2.0kW
– TO –
8.0kW
CAPACITY RANGE

8
MODELS

# FTXF

## Compact design for everyday comfort

NEW

### Compact size
Both the indoor and outdoor units feature a more compact design for easier installation.

### Whisper quiet
Indoor Unit Quiet mode that reduces the indoor unit operational noise level down to 19dBA[1].

### Higher operation limits
Engineered for Australian extremes, FTXF can operate in ambient temperatures up to 50°C, providing reliable cooling performance even in harsh summer conditions.

### Expanded range
New additional 8.0kW model provides powerful airflow delivery, ideal for large open plan living spaces.

### Mould-proof operation[2]
Activates after cooling or dry operation to help prevent the build up of mould and odour.

### Comfort mode
Airflow direction is optimised such that airflow is streamed upwards during cooling to prevent cold airflow being blown onto the body and downward during heating to drive warm air towards the floor of the room.


[1]Refers to 2.0kW, 2.5kW & 3.5kW models in cooling operation, indoor unit sound levels are determined in an anechoic chamber at a distance of 1 metre from the front of the unit. They are normally higher during actual operation due to ambient conditions.

[2]Does not guarantee the prevention or removal of all mould. Mould-proof operation function can be toggled (On/Off) via the wireless controller

**Note:** Please see features checklist on page 34 for full list of features.



## Technology

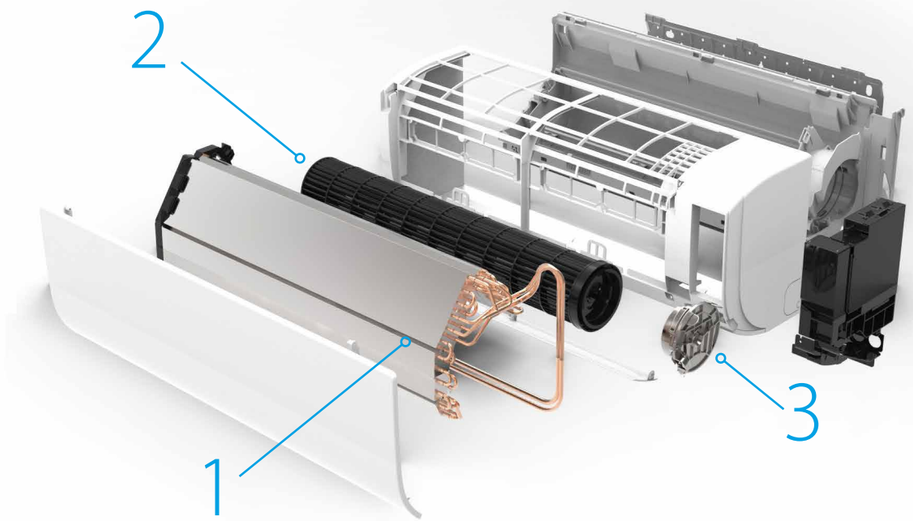


1. **Redesigned heat exchanger**
Slit type fin design with Ø5mm piping increases heat exchange area for improved capacity output and energy performance.

2. **Cross flow fan**
Large diameter rotor with aerofoil blade design delivers larger volumes of air more quietly than ever before.

3. **New ODM motor**
Compact 10 pole DC outer diameter rotor motor delivers higher torque more efficiently.



**Mobile Controller Interface (Optional)[3]**
Control your Daikin Split System from anywhere, anytime.

## Energy rating


| STAR RATING | CLASS | 20 | 25 | 35 | 46 | 50 | 60 | 71 | 80 |
|---|---|---|---|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 4/3.5/3.5 ★ | 4.5/4/4.5 ★ | 4/3.5/3.5 ★ | 3.5/3.5/3.5 ★ | 3.5/3/3.5 ★ | 3.5/3.5/3.5 ★ | 3/3/3.5 ★ | 3/3/3 ★ |
| | HEAT | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ | 3/2.5/1.5 ★ | 2.5/2/1.5 ★ |

[3] BRP084C42 adaptor required

**ZERL (Residential)** refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Powerful performance and premium features meet sophisticated design to deliver ultimate comfort for open plan living.

XL PREMIUM

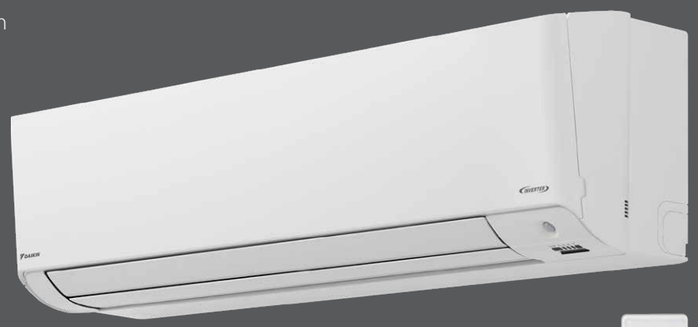



8.5kW – TO – 9.5kW
CAPACITY RANGE

2
MODELS

SENSITIVE CHOICE



Mobile Controller Interface (Included)
Control your Daikin Split System from anywhere, anytime.

# XL Premium

## Ultimate choice for open plan living

### Advanced purification
Each model is fitted with 3 layers of filtration, including a pre-filter, enzyme blue deodorising filter and Streamer Technology to catch and decompose odours and bacteria.

### Streamer Technology
Daikin's signature Streamer Technology eliminates more than 99.6%[1] of pollen in 2 hours, 99.9%[2] of mould in 24 hours and 99.61%[1] of allergens in 24 hours.

### Aerodynamic end vane louvres
Redesigned main discharge louvres with aerodynamic end vanes reduces turbulence for better draught-free comfort.

### Intelligent comfort
Each model is fitted with Daikin's Intelligent Eye that automatically enables energy saving operations when the room is unoccupied for 20 minutes.

### Built-in Wi-Fi
With Wi-Fi built in as standard, conveniently control everything with Daikin's Mobile Controller App or Voice Control via your Smart Home Interface.

### Mould-proof operation[3]
Activates after cooling or dry operation to help prevent the build up of mould and odour.

## Energy rating

| STAR RATING | CLASS | 85 | 95 |
|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 3.5/3/3.5 ★ | 3.5/3/3 ★ |
| | HEAT | 2.5/2/2 ★ | 2.5/2/1.5 ★ |


[1]Verified at Wakayama Medical University with the following test condition: Irradiated allergens with Streamer & checked decomposition of allergen proteins by either the ELISA method, electrophoresis or electron microscopy. [2]Verified at Japan Food Research Laboratories using antibacterial test/mould elimination test (test number: 204041635-001). [3]Does not guarantee the prevention or removal of all mould. Mould-proof operation function can be toggled (On/Off) via the wireless controller

**Note:** XL Premium & XL have different appearances, please see features checklist on page 34 for full list of features



Combining high capacity performance with a sleek design to ensure comfort in open plan living environments.

XL

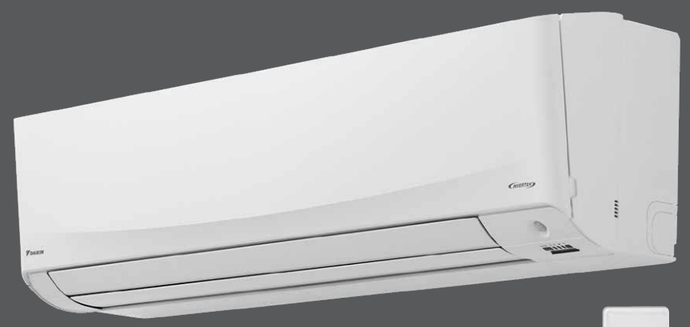



8.0kW – TO – 9.0kW
CAPACITY RANGE

2
MODELS

SENSITIVE CHOICE



Mobile Controller Interface (Optional)[4]
Control your Daikin Split System from anywhere, anytime.

# XL

## Designed for comfort in large spaces

### Air purification
Each model is fitted with an enzyme blue deodorising air purification filter that traps microscopic particles, decomposes odours and even deactivates bacteria.

### Aerodynamic end vane louvres
Redesigned main discharge louvres with aerodynamic end vanes reduces turbulence and for better draught free comfort.

### Mould-proof operation[5]
Activates after cooling or dry operation to help prevent the build up of mould and odour.

### Intelligent comfort
Each model is fitted with Daikin's Intelligent Eye that automatically enables energy saving operations when the room is unoccupied for 20 minutes.

### Comfort mode
Airflow direction is optimised such that airflow is streamed upwards during cooling to prevent cold airflow being blown onto the body and downward during heating to drive warm air towards the floor of the room.

## Energy rating

| STAR RATING | CLASS | 80 | 90 |
|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 3.5/3/3.5 ★ | 3/3/3 ★ |
| | HEAT | 2.5/2/1.5 ★ | 2.5/2/1.5 ★ |

[4] BRP084C42 adaptor required

[5]Does not guarantee the prevention or removal of all mould. Mould-proof operation function can be toggled (On/Off) via the wireless controller
**ZERL (Residential)** refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Compact floor standing unit with a wide selection of capacities, ideal for placement under a window sill or semi-recessed into an unused fireplace.





SENSITIVE CHOICE

2.5kW – TO – 6.7kW
CAPACITY RANGE

6
MODELS

# Floor Standing

## Compact & convenient

### Ultimate heating
New Heat Plus and Heat Boost modes bring indoor heating to the next level, prioritising indoor comfort during cold nights.

### Hot start
Prior to heating, the indoor unit warms to a pre-set temperature before the fan switches on, ensuring only warm air is discharged and eliminating cold draughts.

### Advanced purification
Each model is fitted with three layers of filtration, prefilter for large particulates, enzyme blue deodorising filter for odours and Daikin's Streamer Technology for powerful oxidative decomposition of pollutants.

### Floor warming
Optimises heat flow from the bottom louvre to quickly heat the floor area around the unit with convection air flow for greater floor coverage.

### Built-in Wi-Fi
With Wi-Fi built in as standard, conveniently control everything with Daikin's Mobile Controller App or Voice Control via your Smart Home Interface.


### Mould-proof operation[1]
Activates after cooling or dry operation to help prevent the build up of mould and odour.

[1]Does not guarantee the prevention or removal of all mould. Mould-proof operation function can be toggled (On/Off) via the wireless controller

**Note:** Please see features checklist on page 34 for full list of features



## Technology

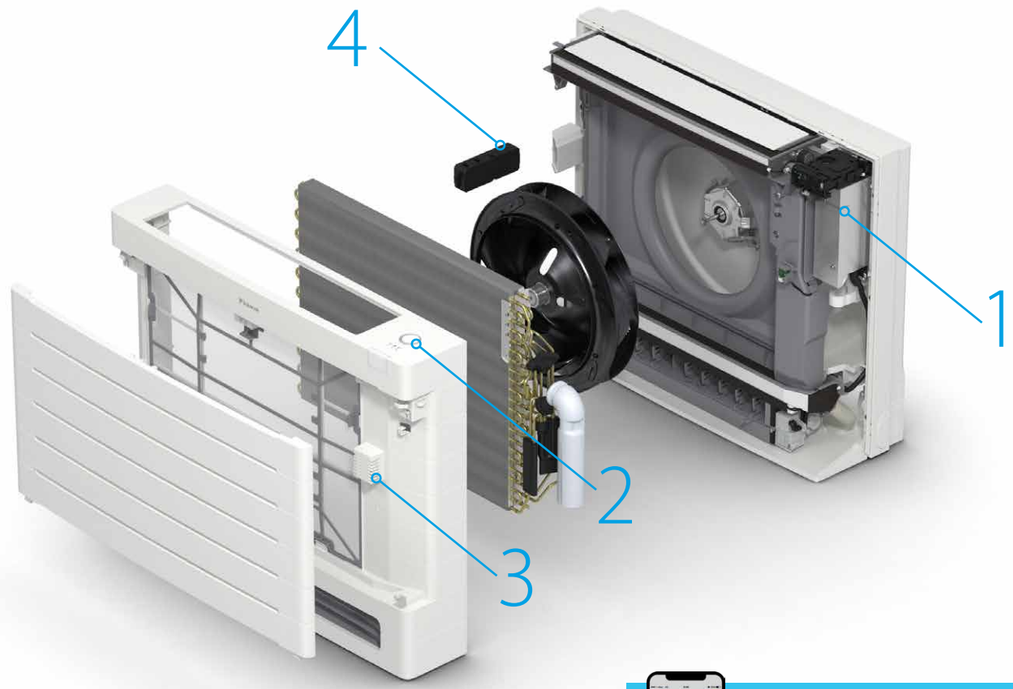




**Mobile Controller Interface (Included)**
Control your Daikin Split System from anywhere, anytime.

### 1. Heat boost technology
Improved logic enables a boosted compressor state to help reach a comfortable indoor temperature quicker than a conventional heater.

### 2. Daikin eye
Daikin signature eye technology enables easy, at a glance updates on unit operation mode.

### 3. Humidity sensor
Monitors humidity to accurately control supply air temperature for comfortable and effective dehumidification of your room during Program Dry Function operation.

### 4. Streamer Technology
Discharges high speed electrons generating powerful oxidative decomposition that has been proven to eliminate more than 99.6%[2] of pollen in 2 hours, 99.9%[3] of mould in 24 hours and 99.61%[2] of allergens in 24 hours.

STREAMER


## Energy rating

| STAR RATING | CLASS | 25 | 35 | 45 | 50 | 60 | 71 |
|---|---|---|---|---|---|---|---|
| ZERL (Residential) Hot/Avg/Cold | COOL | 4.5/3.5/3.5 ★ | 4.5/3.5/3.5 ★ | 3.5/3/3 ★ | 4.5/3.5/3.5 ★ | 3.5/3/3 ★ | 3/3/3 ★ |
| | HEAT | 3.5/3/2.5 ★ | 3/2.5/2.5 ★ | 3/2.5/2 ★ | 3.5/3/2.5 ★ | 3/2.5/2 ★ | 3/2.5/2 ★ |

**ZERL (Residential)** refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

[2]Verified at Wakayama Medical University with the following test condition: Irradiated allergens with Streamer & checked decomposition of allergen proteins by either the ELISA method, electrophoresis or electron microscopy.

[3]Verified at Japan Food Research Laboratories using antibacterial test/mould elimination test (test number: 204041635-001).

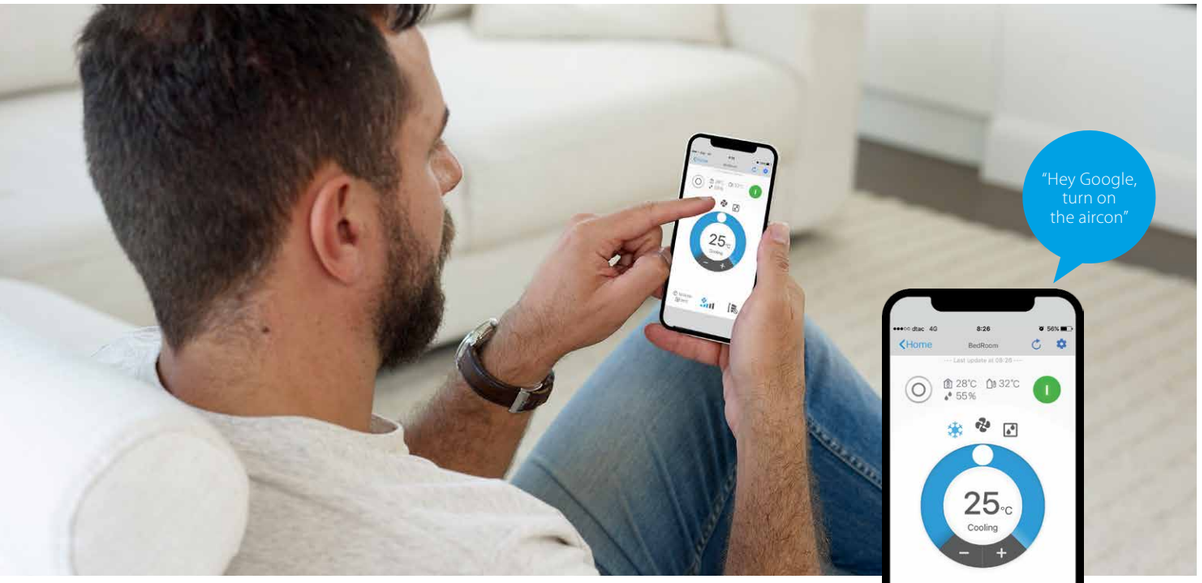


# Mobile Controller

## Smart Wi-Fi control for your Daikin split system

Mobile Controller puts your air conditioner's frequently used functions at your fingertips with an easy-to-use app.

Whether utilising built-in connectivity or an optional Wi-Fi adaptor[1], this user-friendly app allows you to seamlessly operate your air conditioning unit from your smart device[2] via your local network or the internet.

## Three ways to connect

### 1. Direct connection

For locations without a Wi-Fi network, the app can wirelessly connect directly to the Wi-Fi equipped air conditioner, when in range.

### 2. Wi-Fi connection

A Wi-Fi equipped air conditioner can easily be joined to a local Wi-Fi network. Once connected, the system can be controlled from any networked Android or iOS device.

### 3. Internet connection

Monitor and control your system from virtually anywhere, adjusting temperature and setting for a comfortable environment ready for when you arrive home. With no subscription costs from Daikin, all you need is a permanent internet connection for your Wi-Fi network, and an internet connection for your phone or tablet.

The Daikin Mobile Controller app is available for download, free from the Apple App Store or Google Play.

Download on the App Store

GET IT ON Google Play

Amazon Alexa Enabled

Google Assistant Enabled

| FUNCTION | WALL MOUNTED SYSTEMS | FLOOR STANDING SYSTEMS |
|---|---|---|
| Start/stop operation | ✓ | ✓ |
| Set operation mode: Auto/Cool/Heat/Fan/Dry | ✓ | ✓ |
| Set temperature operation | ✓ | ✓ |
| Set fan speed | ✓ | ✓ |
| Set airflow direction | ✓ | ✓ |
| Show room temperature | ✓ | ✓ |
| Group control | ✓ | ✓ |
| Error notification | ✓ | ✓ |
| Set weekly schedule:<br>- Start/stop operation<br>- Select operation mode<br>- Set temperature<br>Maximum 6 actions per day | ✓ | ✓ |
| Vacation mode | ✓ | ✓ |


[1]Modbus protocol included
[2]Portrait orientation only



# The Sensitive Choice for your home

We're proud of our innovations. So we're pleased to announce that Daikin is the only Split System to receive approval from the National Asthma Council Australia. They introduced the Sensitive Choice® program to help identify products better suited for people who suffer from asthma and allergies. Daikin Zena, Alira X, Cora, Floor Standing, XL Premium, XL split systems and all Air Purifiers are recognised by the sensitive Choice program, and carry the Blue Butterfly symbol.

SENSITIVE CHOICE
NATIONAL ASTHMA COUNCIL AUSTRALIA

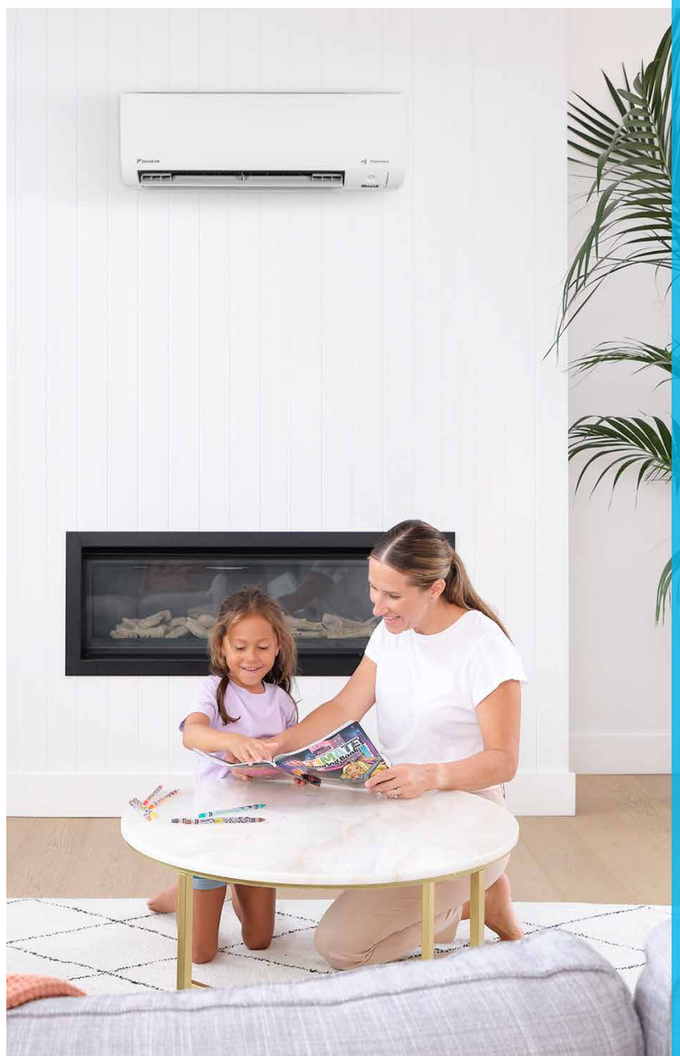




# Trusted Brand

Daikin is proud to be the back-to-back winner of the Trusted Brands in Air Conditioning award, as commissioned by Reader's Digest Australia. This recognition, independently surveyed by Catalyst Research, involved more than 4,300 Australians who collectively voted Daikin as the most trusted air conditioner brand in 2023 to 2026.




# Finder Awards

Daikin has also been awarded Australia's Most Reliable Air Conditioner Brand in the Finder Customer Satisfaction Awards in both 2024 and 2025.

Voted by real Australians, Daikin topped the categories of reliability, ease of use, and top performance while highly commended in being most loved, easy to clean and a highly recommended brand.



# Why Choose a Daikin Specialist Dealer?

Like us, our Dealers are specialists. They know the ups and downs, ins and outs of air conditioning. So their expertise ensures you get the right advice for your needs.

Daikin Specialist Dealers provide custom designed solutions for your home through an in-home quotation. Dealers will not only supply and install the best possible air conditioning solution but will also provide ongoing maintenance to ensure peak efficient performance over the life of the system.

To take the stress out of air conditioning your home, speak to a Daikin Specialist Dealer. With over 450 Specialist Dealers across Australia, our specialists are ready to help you fit the right air conditioning solution for your home.

All appointed Daikin Specialist Dealers are independently owned and operated businesses.








## Zena – Reverse Cycle

WHITE HAIR LINE



BLACK WOOD






STREAMER

SENSITIVE CHOICE

| INDOOR UNIT | | FTXJ25TVMAW | FTXJ35TVMAW | FTXJ50TVMAW | FTXJ60TVMAW | FTXJ25TVMAK | FTXJ35TVMAK | FTXJ50TVMAK | FTXJ60TVMAK |
|---|---|---|---|---|---|---|---|---|---|
| OUTDOOR UNIT | | RXJ25TVMA | RXJ35TVMA | RXJ50TVMA | RXJ60TVMA | RXJ25TVMA | RXJ35TVMA | RXJ50TVMA | RXJ60TVMA |
| Rated Capacity | Cool (kW) | 2.5 | 3.5 | 5.0 | 6.0 | 2.5 | 3.5 | 5.0 | 6.0 |
| | Heat (kW) | 3.2 | 3.7 | 6.0 | 7.2 | 3.2 | 3.7 | 6.0 | 7.2 |
| Capacity Range | Cool (kW) | 0.9-3.7 | 0.9-4.2 | 1.1-5.6 | 1.1-6.5 | 0.9-3.7 | 0.9-4.2 | 1.1-5.6 | 1.1-6.5 |
| | Heat (kW) | 0.9-5.0 | 0.9-5.2 | 1.0-7.9 | 1.0-8.2 | 0.9-5.0 | 0.9-5.2 | 1.0-7.9 | 1.0-8.2 |
| Indoor Airflow Rate (H) | Cool (l/s) | 177 | 190 | 218 | 243 | 177 | 190 | 218 | 243 |
| | Heat (l/s) | 203 | 212 | 238 | 273 | 203 | 212 | 238 | 273 |
| Indoor Fan Speeds | | 5 steps, quiet and automatic | | | | | | | |
| Star Rating (Hot/Avg/Cold) ZERL (Residential) | Cool | 4/3.5/3.5 | 3.5/3.5/3.5 | 3.5/3/3 | 2.5/2.5/2.5 | 4/3.5/3.5 | 3.5/3.5/3.5 | 3.5/3/3 | 2.5/2.5/2.5 |
| | Heat | 3/3/2.5 | 3/2.5/2.5 | 3/2.5/2 | 3/2.5/2 | 3/3/2.5 | 3/2.5/2.5 | 3/2.5/2 | 3/2.5/2 |
| Front Panel Colour | | White Hair Line | | | | Black Wood | | | |
| Power Supply | | 1 phase, 220-240V, 50Hz | | | | | | | |
| Power Input (Rated) | Cool (kW) | 0.49 | 0.81 | 1.32 | 1.83 | 0.49 | 0.81 | 1.32 | 1.83 |
| | Heat (kW) | 0.66 | 0.81 | 1.49 | 1.88 | 0.66 | 0.81 | 1.49 | 1.88 |
| E.E.R/C.O.P | Cool/Heat | 5.10/4.85 | 4.32/4.57 | 3.79/4.03 | 3.28/3.83 | 5.10/4.85 | 4.32/4.57 | 3.79/4.03 | 3.28/3.83 |
| TCSPF (Residential) | Hot/Avg/Cold | 5.91/5.43/5.47 | 5.50/5.13/5.27 | 5.07/4.73/4.90 | 4.43/4.17/4.34 | 5.91/5.43/5.47 | 5.50/5.13/5.27 | 5.07/4.73/4.90 | 4.43/4.17/4.34 |
| HSPF (Residential) | Hot/Avg/Cold | 4.93/4.70/4.40 | 4.62/4.41/4.07 | 4.67/4.29/3.95 | 4.53/4.14/3.78 | 4.93/4.70/4.40 | 4.62/4.41/4.07 | 4.67/4.29/3.95 | 4.53/4.14/3.78 |
| A.E.E.R/A.C.O.P | Cool/Heat | 5.03/4.80 | 4.29/4.53 | 3.76/4.00 | 3.26/3.81 | 5.03/4.80 | 4.29/4.53 | 3.76/4.00 | 3.26/3.81 |
| Dimensions (HxWxD) | Indoor (mm) | 295x798x185 | | | | 295x798x185 | | | |
| | Outdoor (mm) | 550x675x284 | | 695x930x350 | | 550x675x284 | | 695x930x350 | |
| Weight | Indoor (kg) | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 |
| | Outdoor (kg) | 30 | 30 | 54 | 54 | 30 | 30 | 54 | 54 |
| Compressor Type | | Hermetically Sealed Swing Type | | | | | | | |
| Refrigerant Type | | R32 | | | | | | | |
| Max Pipe Length | (m) | 20 | 20 | 30 | 30 | 20 | 20 | 30 | 30 |
| Max Level Difference | (m) | 15 | 15 | 20 | 20 | 15 | 15 | 20 | 20 |
| Pipe Sizes | Liquid (mm) | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 |
| | Gas (mm) | 9.5 | 9.5 | 12.7 | 12.7 | 9.5 | 9.5 | 12.7 | 12.7 |
| Outdoor Operating Range | Cool (°CDB) | -10 to 46 | | | | | | | |
| | Heat (°CWB) | -15 to 18 | | | | | | | |
| Indoor Sound Level (H/SL) | Cool (dBA) | 40/19 | 42/20 | 45/32 | 48/33 | 40/19 | 42/20 | 45/32 | 48/33 |
| | Heat (dBA) | 41/19 | 42/20 | 45/32 | 48/33 | 41/19 | 42/20 | 45/32 | 48/33 |
| Outdoor Sound Level (H/SL) | Cool (dBA) | 47/43 | 49/44 | 47/44 | 49/45 | 47/43 | 49/44 | 47/44 | 49/45 |
| | Heat (dBA) | 48/44 | 49/45 | 48/45 | 52/45 | 48/44 | 49/45 | 48/45 | 52/45 |
| Outdoor EPA Sound Power Level (H) | Cool (dBA) | 59 | 61 | 59 | 61 | 59 | 61 | 59 | 61 |
| | Heat (dBA) | 60 | 61 | 60 | 64 | 60 | 61 | 60 | 64 |

ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Please refer to notes on page 34

# Alira X – Reverse Cycle




| INDOOR UNIT | | FTXM20AVMA | FTXM25AVMA | FTXM35AVMA | FTXM46AVMA | FTXM50AVMA | FTXM60AVMA | FTXM71AVMA |
|---|---|---|---|---|---|---|---|---|
| OUTDOOR UNIT | | RXM20AVMA | RXM25AVMA | RXM35AVMA | RXM46AVMA | RXM50AVMA | RXM60AVMA | RXM71AVMA |
| Rated Capacity | Cool (kW) | 2.2 | 2.5 | 3.5 | 4.6 | 5.0 | 6.0 | 7.1 |
| | Heat (kW) | 2.7 | 3.2 | 3.7 | 4.7 | 6.0 | 7.2 | 8.0 |
| Capacity Range | Cool (kW) | 1.1-3.4 | 1.1-3.8 | 1.1-4.5 | 1.1-5.5 | 1.1-6.7 | 1.1-7.5 | 2.0-8.9 |
| | Heat (kW) | 1.0-5.5 | 1.0-6.0 | 1.0-6.1 | 1.0-6.7 | 1.0-8.2 | 1.0-9.8 | 1.7-10.9 |
| Indoor Airflow Rate (H) | Cool (l/s) | 208 | 220 | 232 | 258 | 355 | 412 | 425 |
| | Heat (l/s) | 218 | 227 | 237 | 263 | 363 | 418 | 433 |
| Indoor Fan Speeds | | 5 steps, quiet and automatic | | | | | | |
| Star Rating (Hot/Avg/Cold) ZERL (Residential) | Cool | 6.5/5.5/6 | 6.5/5.5/6 | 5.5/5/5.5 | 4.5/4/4.5 | 5.5/5/5.5 | 4.5/4.5/5 | 4/3.5/3.5 |
| | Heat | 4.5/4/3.5 | 4.5/4/3.5 | 4.5/3.5/3 | 4/3.5/3 | 4/3.5/3 | 4/3/2.5 | 4/3/2.5 |
| Front Panel Colour | | White | | | | | | |
| Power Supply | | 1 phase, 220-240V, 50Hz | | | | | | |
| Power Input (Rated) | Cool (kW) | 0.42 | 0.47 | 0.80 | 1.10 | 1.13 | 1.48 | 2.03 |
| | Heat (kW) | 0.45 | 0.57 | 0.76 | 1.02 | 1.22 | 1.61 | 1.83 |
| E.E.R/C.O.P | Cool/Heat | 5.30/6.00 | 5.32/5.61 | 4.37/4.87 | 4.18/4.61 | 4.42/4.92 | 4.05/4.47 | 3.50/4.37 |
| TCSPF (Residential) | Hot/Avg/Cold | 8.02/7.27/7.55 | 8.19/7.45/7.73 | 7.46/6.78/7.20 | 6.11/5.77/6.06 | 7.08/6.62/7.07 | 6.49/6.11/6.55 | 5.55/5.13/5.41 |
| HSPF (Residential) | Hot/Avg/Cold | 6.09/5.82/5.48 | 6.21/5.72/5.24 | 6.08/5.33/4.79 | 5.61/5.08/4.62 | 5.84/5.28/4.66 | 5.55/4.95/4.35 | 5.71/4.95/4.36 |
| A.E.E.R/A.C.O.P | Cool/Heat | 5.25/5.95 | 5.27/5.57 | 4.35/4.84 | 4.17/4.59 | 4.41/4.90 | 4.04/4.46 | 3.47/4.33 |
| Dimensions (HxWxD) | Indoor (mm) | 299x839x280 | | | 299x921x280 | 299x1101x280 | | |
| | Outdoor (mm) | 595x845x300 | | | 695x930x350 | | | 990x940x320 |
| Weight | Indoor (kg) | 13 | 13 | 13 | 14 | 16 | 16 | 16 |
| | Outdoor (kg) | 36 | 36 | 36 | 50 | 52 | 52 | 75 |
| Compressor Type | | Hermetically Sealed Swing Type | | | | | | |
| Refrigerant Type | | R32 | | | | | | |
| Max Pipe Length | (m) | 20 | 20 | 20 | 30 | 30 | 30 | 30 |
| Max Level Difference | (m) | 15 | 15 | 15 | 20 | 20 | 20 | 20 |
| Pipe Sizes | Liquid (mm) | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 |
| | Gas (mm) | 9.5 | 9.5 | 9.5 | 12.7 | 12.7 | 12.7 | 15.9 |
| Outdoor Operating Range | Cool (°CDB) | -10 to 50 | | | | | | |
| | Heat (°CWB) | -15 to 18 | | | | | | |
| Indoor Sound Level (H/SL) | Cool (dBA) | 39/19 | 41/19 | 42/19 | 43/26 | 45/28 | 48/29 | 49/30 |
| | Heat (dBA) | 39/20 | 40/20 | 42/20 | 43/26 | 45/28 | 48/29 | 49/30 |
| Outdoor Sound Level (H/SL) | Cool (dBA) | 48/44 | 48/44 | 49/45 | 47/44 | 47/44 | 49/45 | 54/51 |
| | Heat (dBA) | 50/45 | 50/45 | 50/45 | 48/45 | 48/45 | 52/45 | 55/51 |
| Outdoor EPA Sound Power Level (H) | Cool (dBA) | 58 | 59 | 61 | 59 | 59 | 61 | 65 |
| | Heat (dBA) | 59 | 60 | 61 | 60 | 60 | 64 | 66 |

ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Please refer to notes on page 34





# Cora – Reverse Cycle





| INDOOR UNIT | | FTXV20AVMA | FTXV25AVMA | FTXV35AVMA | FTXV46AVMA | FTXV50AVMA | FTXV60AVMA | FTXV71AVMA |
|---|---|---|---|---|---|---|---|---|
| OUTDOOR UNIT | | RXV20AVMA | RXV25AVMA | RXV35AVMA | RXV46AVMA | RXV50AVMA | RXV60AVMA | RXV71AVMA |
| Rated Capacity | Cool (kW) | 2.0 | 2.5 | 3.5 | 4.6 | 5.0 | 6.0 | 7.1 |
| | Heat (kW) | 2.7 | 3.2 | 3.7 | 4.7 | 6.0 | 7.2 | 8.0 |
| Capacity Range | Cool (kW) | 1.0-3.0 | 1.0-3.7 | 1.0-4.4 | 1.1-5.5 | 1.1-6.7 | 1.1-7.5 | 2.0-8.9 |
| | Heat (kW) | 0.9-4.4 | 0.9-5.4 | 0.9-5.5 | 1.0-6.7 | 1.0-8.0 | 1.0-9.8 | 2.0-10.8 |
| Indoor Airflow Rate (H) | Cool (l/s) | 158 | 183 | 190 | 200 | 273 | 313 | 330 |
| | Heat (l/s) | 175 | 185 | 202 | 207 | 310 | 362 | 362 |
| Indoor Fan Speeds | | 5 steps, quiet and automatic | | | | | | |
| Star Rating (Hot/Avg/Cold) | Cool | 5.5/5/5 | 6/5.5/6 | 5.5/4.5/5 | 4/3.5/4 | 5/4.5/5 | 4/4/4 | 3.5/3/3.5 |
| ZERL (Residential) | Heat | 4/3.5/3 | 4/3.5/3 | 4/3.5/3 | 3/2.5/2.5 | 3.5/3/2.5 | 3.5/3/2.5 | 3/2.5/2 |
| Front Panel Colour | | White | | | | | | |
| Power Supply | | 1 phase, 220-240V, 50Hz | | | | | | |
| Power Input (Rated) | Cool (kW) | 0.40 | 0.49 | 0.81 | 1.14 | 1.14 | 1.52 | 2.05 |
| | Heat (kW) | 0.51 | 0.66 | 0.87 | 1.15 | 1.29 | 1.63 | 1.94 |
| E.E.R/C.O.P | Cool/Heat | 5.00/5.29 | 5.15/4.85 | 4.32/4.25 | 4.04/4.09 | 4.39/4.65 | 3.95/4.42 | 3.46/4.12 |
| TCSPF (Residential) | Hot/Avg/Cold | 7.43/6.67/6.87 | 7.96/7.28/7.53 | 7.05/6.47/6.88 | 5.72/5.41/5.62 | 6.94/6.47/6.88 | 5.96/5.64/6.00 | 5.37/4.95/5.22 |
| HSPF (Residential) | Hot/Avg/Cold | 5.89/5.44/4.99 | 5.87/5.32/4.86 | 5.92/5.12/4.54 | 4.95/4.47/4.06 | 5.12/4.74/4.26 | 5.00/4.57/4.02 | 4.92/4.43/3.91 |
| A.E.E.R/A.C.O.P | Cool/Heat | 4.94/5.25 | 5.10/4.81 | 4.30/4.23 | 4.02/4.07 | 4.37/4.63 | 3.94/4.40 | 3.44/4.09 |
| Dimensions (HxWxD) | Indoor (mm) | 285x770x223 | | | | 295x990x263 | | |
| | Outdoor (mm) | 595x845x300 | | | 695x930x350 | | | |
| Weight | Indoor (kg) | 9 | 9 | 9 | 9 | 13 | 13 | 13 |
| | Outdoor (kg) | 36 | 36 | 36 | 50 | 52 | 52 | 56 |
| Compressor Type | | Hermetically Sealed Swing Type | | | | | | |
| Refrigerant Type | | R32 | | | | | | |
| Max Pipe Length | (m) | 20 | 20 | 20 | 30 | 30 | 30 | 30 |
| Max Level Difference | (m) | 15 | 15 | 15 | 20 | 20 | 20 | 20 |
| Pipe Sizes | Liquid (mm) | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 |
| | Gas (mm) | 9.5 | 9.5 | 9.5 | 12.7 | 12.7 | 12.7 | 12.7 |
| Outdoor Operating Range | Cool (°CDB) | -10 to 50 | | | | | | |
| | Heat (°CWB) | -15 to 18 | | | | | | |
| Indoor Sound Level (H/SL) | Cool (dBA) | 38/19 | 42/19 | 42/19 | 44/26 | 45/28 | 48/29 | 49/30 |
| | Heat (dBA) | 39/20 | 40/20 | 42/20 | 43/26 | 45/28 | 48/29 | 49/30 |
| Outdoor Sound Level (H/SL) | Cool (dBA) | 48/44 | 48/44 | 49/45 | 47/44 | 47/44 | 49/45 | 53/49 |
| | Heat (dBA) | 50/45 | 50/45 | 50/45 | 48/45 | 51/45 | 52/45 | 54/49 |
| Outdoor EPA Sound Power Level (H) | Cool (dBA) | 60 | 60 | 61 | 59 | 59 | 61 | 65 |
| | Heat (dBA) | 62 | 62 | 62 | 60 | 62 | 64 | 66 |

ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Please refer to notes on page 34

# FTXF - Reverse Cycle

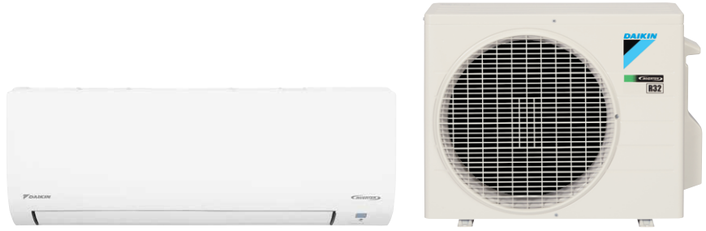

| INDOOR UNIT | | FTXF20AVMA | FTXF25AVMA | FTXF35AVMA | FTXF46AVMA | FTXF50AVMA | FTXF60AVMA | FTXF71AVMA | FTXF80AVMA |
|---|---|---|---|---|---|---|---|---|---|
| OUTDOOR UNIT | | RXF20AVMA | RXF25AVMA | RXF35AVMA | RXF46AVMA | RXF50AVMA | RXF60AVMA | RXF71AVMA | RXF80AVMA |
| Rated Capacity | Cool (kW) | 2.0 | 2.5 | 3.5 | 4.6 | 5.0 | 6.0 | 7.1 | 7.8 |
| | Heat (kW) | 2.5 | 3.0 | 3.7 | 4.7 | 5.2 | 6.5 | 8.0 | 9.0 |
| Capacity Range | Cool (kW) | 0.9-2.3 | 0.9-2.8 | 0.9-3.7 | 1.5-5.0 | 1.5-5.5 | 1.6-6.5 | 2.0-7.5 | 2.0-8.9 |
| | Heat (kW) | 0.9-3.2 | 0.9-4.0 | 0.9-4.1 | 1.0-6.0 | 1.0-6.2 | 1.0-6.9 | 2.0-8.0 | 2.2-10.0 |
| Indoor Airflow Rate (H) | Cool (l/s) | 152 | 160 | 173 | 200 | 208 | 322 | 327 | 323 |
| | Heat (l/s) | 160 | 168 | 188 | 203 | 213 | 350 | 357 | 362 |
| Indoor Fan Speeds | | 5 steps, quiet and automatic | | | | | | | |
| Star Rating (Hot/Avg/Cold) | Cool | 4/3.5/3.5 | 4.5/4/4.5 | 4/3.5/3.5 | 3.5/3.5/3.5 | 3.5/3/3.5 | 3.5/3.5/3.5 | 3/3/3.5 | 3/3/3 |
| ZERL (Residential) | Heat | 3/2.5/2 | 3/2.5/2 | 3/2.5/2 | 3/2.5/2 | 3/2.5/2 | 3/2.5/2 | 3/2.5/1.5 | 2.5/2/1.5 |
| Front Panel Colour | | Pearl Pure White | | | | | | | |
| Power Supply | | 1 phase, 220-240V, 50Hz | | | | | | | |
| Power Input (Rated) | Cool (kW) | 0.51 | 0.53 | 0.91 | 1.19 | 1.41 | 1.64 | 2.14 | 2.38 |
| | Heat (kW) | 0.57 | 0.63 | 0.86 | 1.18 | 1.35 | 1.66 | 2.12 | 2.40 |
| E.E.R/C.O.P | Cool/Heat | 3.92/4.39 | 4.72/4.76 | 3.85/4.30 | 3.87/3.98 | 3.55/3.85 | 3.66/3.92 | 3.32/3.77 | 3.28/3.75 |
| TCSPF (Residential) | Hot/Avg/Cold | 5.56/5.12/5.31 | 6.31/5.85/6.03 | 5.52/5.19/5.45 | 5.49/5.14/5.38 | 5.12/4.81/5.06 | 5.48/5.16/5.47 | 4.99/4.72/5.01 | 4.97/4.62/4.89 |
| HSPF (Residential) | Hot/Avg/Cold | 4.71/4.16/3.51 | 4.97/4.42/3.72 | 4.88/4.36/3.74 | 4.90/4.39/3.90 | 4.69/4.15/3.59 | 4.82/4.15/3.51 | 4.88/4.05/3.35 | 4.31/3.86/3.34 |
| A.E.E.R/A.C.O.P | Cool/Heat | 3.89/4.35 | 4.68/4.73 | 3.83/4.28 | 3.84/3.96 | 3.53/3.83 | 3.64/3.90 | 3.31/3.76 | 3.26/3.73 |
| Dimensions (HxWxD) | Indoor (mm) | 285x770x223 | | | | | 295x990x263 | | |
| | Outdoor (mm) | 550x675x284 | | | 595x845x300 | | | 695x930x350 | |
| Weight | Indoor (kg) | 9 | 9 | 9 | 9 | 9 | 12 | 13 | 13.0 |
| | Outdoor (kg) | 27 | 28 | 28 | 39 | 39 | 39 | 52 | 56 |
| Compressor Type | | Hermetically Sealed Swing Type | | | | | | | |
| Refrigerant Type | | R32 | | | | | | | |
| Max Pipe Length | (m) | 20 | 20 | 20 | 30 | 30 | 30 | 30 | 30 |
| Max Level Difference | (m) | 15 | 15 | 15 | 20 | 20 | 20 | 20 | 20.0 |
| Pipe Sizes | Liquid (mm) | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 |
| | Gas (mm) | 9.5 | 9.5 | 9.5 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 |
| Outdoor Operating Range | Cool (°CDB) | -10 to 50 | | | | | | | |
| | Heat (°CWB) | -15 to 18 | | | | | | | |
| Indoor Sound Level (H/SL) | Cool (dBA) | 39/19 | 40/19 | 42/19 | 44/28 | 45/28 | 46/29 | 49/30 | 31/50 |
| | Heat (dBA) | 39/20 | 40/20 | 42/20 | 44/28 | 45/28 | 46/29 | 49/30 | 31/50 |
| Outdoor Sound Level (H/SL) | Cool (dBA) | 47/43 | 47/43 | 48/44 | 47/44 | 47/44 | 49/46 | 53/47 | 54/48 |
| | Heat (dBA) | 48/44 | 48/44 | 49/45 | 50/46 | 50/46 | 51/47 | 54/49 | 55/50 |
| Outdoor EPA Sound Power Level (H) | Cool (dBA) | 59 | 59 | 60 | 59 | 59 | 61 | 65 | 66 |
| | Heat (dBA) | 60 | 60 | 61 | 62 | 62 | 63 | 66 | 67 |

w

ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Please refer to notes on page 34





# XL Premium - Reverse Cycle




| INDOOR UNIT | | FTXM85WVMA | FTXM95WVMA |
|---|---|---|---|
| OUTDOOR UNIT | | RXM85WVMA | RXM95WVMA |
| Rated Capacity | Cool (kW) | 8.5 | 9.5 |
| | Heat (kW) | 9.0 | 10.3 |
| Capwacity Range | Cool (kW) | 2.0-10.5 | 2.0-11.2 |
| | Heat (kW) | 1.9-11.6 | 1.9-12.0 |
| Indoor Airflow Rate (H) | Cool (l/s) | 380 | 410 |
| | Heat (l/s) | 403 | 425 |
| Indoor Fan Speeds | | 5 steps, quiet and automatic | |
| Star Rating (Hot/Avg/Cold) ZERL (Residential) | Cool | 3.5/3/3.5 | 3.5/3/3 |
| | Heat | 2.5/2/2 | 2.5/2/1.5 |
| Front Panel Colour | | White | |
| Power Supply | | 1 phase, 220-240V, 50Hz | |
| Power Input (Rated) | Cool (kW) | 2.35 | 2.80 |
| | Heat (kW) | 2.66 | 3.10 |
| E.E.R/C.O.P | Cool/Heat | 3.62/3.38 | 3.39/3.32 |
| TCSPF (Residential) | Hot/Avg/Cold | 5.28/4.91/5.15 | 5.01/4.69/4.94 |
| HSPF (Residential) | Hot/Avg/Cold | 4.47/3.93/3.50 | 4.29/3.74/3.24 |
| A.E.E.R/A.C.O.P | Cool/Heat | 3.59/3.36 | 3.37/3.31 |
| Dimensions (HxWxD) | Indoor (mm) | 329x1240x278 | |
| | Outdoor (mm) | 990x940x320 | |
| Weight | Indoor (kg) | 19 | 19 |
| | Outdoor (kg) | 77 | 77 |
| Compressor Type | | Hermetically Sealed Swing Type | |
| Refrigerant Type | | R32 | |
| Max Pipe Length | (m) | 30 | 30 |
| Max Level Difference | (m) | 20 | 20 |
| Pipe Sizes | Liquid (mm) | 6.4 | 6.4 |
| | Gas (mm) | 15.9 | 15.9 |
| Outdoor Operating Range | Cool (°CDB) | -10 to 46 | |
| | Heat (°CWB) | -15 to 18 | |
| Indoor Sound Level (H/SL) | Cool (dBA) | 49/35 | 51/36 |
| | Heat (dBA) | 49/33 | 51/33 |
| Outdoor Sound Level (H/SL) | Cool (dBA) | 54/51 | 54/51 |
| | Heat (dBA) | 55/51 | 55/51 |
| Outdoor EPA Sound Power Level (H) | Cool (dBA) | 66 | 66 |
| | Heat (dBA) | 67 | 67 |

ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Please refer to notes on page 34

# XL - Reverse Cycle




| INDOOR UNIT | | FTXV80WVMA | FTXV90WVMA |
|---|---|---|---|
| OUTDOOR UNIT | | RXV80WVMA | RXV90WVMA |
| Rated Capacity | Cool (kW) | 8.0 | 9.0 |
| | Heat (kW) | 9.0 | 10.3 |
| Capacity Range | Cool (kW) | 2.0-10.5 | 2.0-11.2 |
| | Heat (kW) | 1.9-11.6 | 1.9-12.0 |
| Indoor Airflow Rate (H) | Cool (l/s) | 410 | 440 |
| | Heat (l/s) | 403 | 425 |
| Indoor Fan Speeds | | 5 steps, quiet and automatic | |
| Star Rating (Hot/Avg/Cold) ZERL (Residential) | Cool | 3.5/3/3.5 | 3/3/3 |
| | Heat | 2.5/2/1.5 | 2.5/2/1.5 |
| Front Panel Colour | | Ivory White | |
| Power Supply | | 1 phase, 220-240V, 50Hz | |
| Power Input (Rated) | Cool (kW) | 2.17 | 2.65 |
| | Heat (kW) | 2.75 | 3.15 |
| E.E.R/C.O.P | Cool/Heat | 3.69/3.27 | 3.40/3.27 |
| TCSPF (Residential) | Hot/Avg/Cold | 5.26/4.90/5.12 | 4.99/4.66/4.90 |
| HSPF (Residential) | Hot/Avg/Cold | 4.29/3.79/3.40 | 4.10/3.61/3.15 |
| A.E.E.R/A.C.O.P | Cool/Heat | 3.66/3.25 | 3.38/3.25 |
| Dimensions (HxWxD) | Indoor (mm) | 329x1240x278 | |
| | Outdoor (mm) | 990x940x320 | |
| Weight | Indoor (kg) | 19 | 19 |
| | Outdoor (kg) | 77 | 77 |
| Compressor Type | | Hermetically Sealed Swing Type | |
| Refrigerant Type | | R32 | |
| Max Pipe Length | (m) | 30 | 30 |
| Max Level Difference | (m) | 20 | 20 |
| Pipe Sizes | Liquid (mm) | 6.4 | 6.4 |
| | Gas (mm) | 15.9 | 15.9 |
| Outdoor Operating Range | Cool (°CDB) | -10 to 46 | |
| | Heat (°CWB) | -15 to 18 | |
| Indoor Sound Level (H/SL) | Cool (dBA) | 51/37 | 53/38 |
| | Heat (dBA) | 51/35 | 52/35 |
| Outdoor Sound Level (H/SL) | Cool (dBA) | 54/51 | 54/51 |
| | Heat (dBA) | 55/51 | 55/51 |
| Outdoor EPA Sound Power Level (H) | Cool (dBA) | 66 | 66 |
| | Heat (dBA) | 67 | 67 |

ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Please refer to notes on page 34





# Floor Standing – Reverse Cycle




| INDOOR UNIT | | FVXM25YVMA | FVXM35YVMA | FVXM45YVMA | FVXM50YVMA | FVXM60YVMA | FVXM71YVMA |
|---|---|---|---|---|---|---|---|
| OUTDOOR UNIT | | RXM25YFVMA | RXM35YFVMA | RXM45YFVMA | RXM50YFVMA | RXM60YFVMA | RXM71YFVMA |
| Rated Capacity | Cool (kW) | 2.5 | 3.5 | 4.5 | 5.0 | 6.0 | 6.7 |
| | Heat (kW) | 3.5 | 4.5 | 5.4 | 6.0 | 7.0 | 8.0 |
| Capacity Range | Cool (kW) | 1.2-3.0 | 1.2-3.8 | 1.2-5.0 | 1.7-5.6 | 2.3-6.7 | 2.3-6.7 |
| | Heat (kW) | 1.2-5.4 | 1.2-5.5 | 1.7-6.1 | 1.7-8.1 | 2.3-8.5 | 2.3-9.0 |
| Indoor Airflow Rate (H) | Cool (l/s) | 141 | 150 | 171 | 243 | 243 | 243 |
| | Heat (l/s) | 158 | 171 | 201 | 250 | 261 | 261 |
| Indoor Fan Speeds | | 5 steps, quiet and automatic | | | | | |
| Star Rating (Hot/Avg/Cold) ZERL (Residential) | Cool | 4.5/3.5/3.5 | 4.5/3.5/3.5 | 3.5/3/3 | 4.5/3.5/3.5 | 3.5/3/3 | 3/3/3 |
| | Heat | 3.5/3/2.5 | 3/2.5/2.5 | 3/2.5/2 | 3.5/3/2.5 | 3/2.5/2 | 3/2.5/2 |
| Front Panel Colour | | White | | | | | |
| Power Supply | | 1 phase, 220-240V, 50Hz | | | | | |
| Power Input (Rated) | Cool (kW) | 0.50 | 0.83 | 1.33 | 1.18 | 1.66 | 1.97 |
| | Heat (kW) | 0.76 | 1.12 | 1.44 | 1.44 | 1.82 | 2.20 |
| E.E.R/C.O.P | Cool/Heat | 5.00/4.61 | 4.22/4.02 | 3.38/3.75 | 4.24/4.17 | 3.61/3.85 | 3.40/3.64 |
| TCSPF (Residential) | Hot/Avg/Cold | 6.39/5.22/5.13 | 6.10/5.21/5.28 | 5.13/4.56/4.74 | 6.03/5.34/5.47 | 5.19/4.71/4.88 | 4.93/4.51/4.70 |
| HSPF (Residential) | Hot/Avg/Cold | 5.26/4.84/4.40 | 4.86/4.40/4.00 | 4.76/4.23/3.74 | 5.10/4.58/4.11 | 4.53/4.12/3.70 | 4.53/4.03/3.55 |
| A.E.E.R/A.C.O.P | Cool/Heat | 4.79/4.47 | 4.11/3.94 | 3.33/3.69 | 4.16/4.10 | 3.57/3.80 | 3.36/3.60 |
| Dimensions (HxWxD) | Indoor (mm) | 600x750x238 | | | | | |
| | Outdoor (mm) | 595x845x300 | | | 695x930x350 | | |
| Weight | Indoor (kg) | 18 | 18 | 18 | 18 | 18 | 18 |
| | Outdoor (kg) | 38 | 38 | 38 | 54 | 54 | 54 |
| Compressor Type | | Hermetically sealed swing type | | | | | |
| Refrigerant Type | | R32 | | | | | |
| Max Pipe Length | (m) | 20 | 20 | 20 | 30 | 30 | 30 |
| Max Level Difference | (m) | 15 | 15 | 15 | 20 | 20 | 20 |
| Pipe Sizes | Liquid (mm) | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 |
| | Gas (mm) | 9.5 | 9.5 | 9.5 | 12.7 | 12.7 | 12.7 |
| Outdoor Operating Range | Cool (°CDB) | 10 to 46 | | | | | |
| | Heat (°CWB) | -15 to 18 | | | | | |
| Indoor Sound Level (H/SL) | Cool (dBA) | 38/20 | 39/24 | 44/27 | 51/27 | 52/33 | 52/33 |
| | Heat (dBA) | 38/19 | 42/19 | 48/29 | 51/29 | 52/34 | 52/34 |
| Outdoor Sound Level (H/SL) | Cool (dBA) | 47/44 | 49/45 | 49/45 | 49/45 | 54/45 | 54/45 |
| | Heat (dBA) | 48/45 | 49/45 | 51/45 | 51/45 | 55/46 | 55/46 |
| Outdoor EPA Sound Power Level (H) | Cool (dBA) | 59 | 61 | 61 | 61 | 66 | 66 |
| | Heat (dBA) | 60 | 61 | 63 | 63 | 67 | 67 |

ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination

Please refer to notes on page 34

# Features Checklist

| SERIES | ZENA | ALIRA X | CORA | FTXF | XL PREMIUM | XL | FLOOR STANDING |
|---|---|---|---|---|---|---|---|
| DC Inverter | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PAM Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Standby Power Function | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Power-Airflow Dual Flaps | ✓ | ✓ | ✓[1] | ✓[1] | ✓ | ✓ | |
| Vertical Auto-Swing (up and down) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Horizontal Auto-Swing (right and left) | ✓ | ✓ | ✓ | | ✓ | ✓ | |
| 3-D Airflow | ✓ | ✓ | ✓ | | ✓ | ✓ | |
| Vertical Airflow | ✓ | | | | | | |
| Comfort Airflow Mode | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Indoor Unit Quiet Operation | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Outdoor Unit Quiet Operation | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Daikin Eye | | | | | | | ✓ |
| Intelligent Eye | ✓ | ✓ | ✓ | | ✓ | ✓ | |
| Grid Eye Sensor | ✓ | | | | | | |
| Automatic Operation | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Program Dry Function | ✓ | | ✓ | ✓ | | | |
| Improved Program Dry Function | | ✓ | | | ✓ | ✓ | ✓ |
| Auto Fan Speed | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Hot Start | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Heat Boost | | ✓ | | | | | ✓ |
| Heat Plus | | | | | | | ✓ |
| Floor Warming | | | | | | | ✓ |
| Long Time Heating | | ✓ | | | | | |
| Titanium Apatite Deodorising Filter | ✓ | | | | | | |
| Enzyme Blue Deodorising Filter | | ✓ | ✓ | | ✓ | ✓ | ✓ |
| Air-Purifying Filter | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Streamer Technology | ✓ | ✓ | | | ✓ | | ✓ |
| Mould-Proof Operation[2] | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Econo Mode | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Powerful Operation | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| LCD Wireless Remote Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Indoor Unit On/Off Switch | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Count Up-Down On/Off Timer | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 24-Hour On/Off Timer | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| Weekly Timer | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ |
| Night Set Mode | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Auto-Restart after Power Failure | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Self Diagnosis with Digital Display | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Anticorrosion Treatment of Outdoor Heat Exchanger Fin | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Demand Enabled Response (DRED) | ✓[3] | ✓[3] | ✓[3] | ✓[3] | ✓[3] | ✓[3] | ✓[3] |
| Wireless LAN Connection | ✓ | ✓ | ✓ | ✓[4] | ✓ | ✓[4] | ✓ |
| 0.5°C Step Room Temperature Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

[1] Cora: Only available for 50-71 Class, FTXF: Only available for 60-80 Class

[2] Does not guarantee the prevention or removal of all mould. Mould-proof operation function can be toggled (On/Off) via the wireless controller

[3] Compliant to AS/NZS 4755.3.1:2025 (optional accessory required for Zena, Alira X, Cora & FTXF)

[4] Optional Accessory

**Notes:**

i. The Rated Capacity, Power Input and Running Current are determined under conditions T1 (cooling) or H1 (heating) of AS/NZS 3823.1.1

Cooling: Indoor temp: 27°CDB/19°CWB

Outdoor temp: 35°CDB/24°CWB

Heating: Indoor temp: 20°CDB/15°CWB

Outdoor temp: 7°CDB/6°CWB

ii. The cooling (or heating) output capacity will be reduced below the rated value as the outdoor temperature approaches the maximum (or minimum) outdoor temperature operating range limit

iii. Indoor and outdoor unit sound levels are determined in an anechoic chamber at a distance of 1 metre from the front of the unit. They are normally higher during actual operation due to ambient conditions

iv. Inverter air conditioners do not have a current surge during start up. The compressor start current of an inverter air conditioner is typically lower than specified running current

v. The specifications, designs and information in this brochure are subject to change without notice. Unit colours shown are as close as possible to actual unit colours. Colours depicted in this brochure may vary slightly



# Notes

© Copyright in the contents of this brochure is owned by Daikin Australia Pty Limited and no part of the document may be reproduced in any form without the express written permission of Daikin Australia Pty Limited.

## ASSUMPTIONS

All representations made in Daikin marketing and promotional material are based on the assumptions that the correct equipment has been selected, appropriately sized and installed in accordance with Daikin's installation instructions and standard industry practices.

## QUALITY CERTIFICATIONS

Daikin Industries Limited was the first air conditioning equipment manufacturer in Japan to receive ISO 9001 certification. All Daikin manufacturing facilities have been certified to ISO 9001 Quality Management System requirements. ISO 9001 is a certificate for quality assurance concerning 'design, development, manufacturing, installation and related service' of products manufactured at that factory.

**Residential Air Conditioning**
Manufacturing Div (ISO 9001)
JQA-0486 May 2, 1994
(Shiga Plant)

**Commercial Air Conditioning and Refrigeration**
Manufacturing Div (ISO 9001)
JMI0107 December 28, 1992
(Kanaoka Factory and Rinkai Factory at Sakai Plant)

## ENVIRONMENTAL CERTIFICATIONS

Daikin Industries Limited has received ISO 14001 Environmental Certification for the Daikin production facilities listed below. ISO 14001 is an international standard specifying requirement for an environmental management system, enabling an organisation to formulate policy and objectives, taking into account legislative requirements and information about significant environmental impacts. It applies to those environmental aspects within the organisation's control and over which it can be expected to have an influence.

The certification relates only to the environmental management system and does not constitute any endorsement of the products shipped from the facility by the International Organisation for Standardisation.

| | |
|---|---|
| Head Office / Tokyo Office | Certificate number: EC02J0355 |
| Shiga Plant (Japan) | Certificate number: EC99J2044 |
| Sakai Plant (Japan) | Certificate number: JQA-E-80009 |
| Daikin Industries Ltd (Thailand) | Certificate number: JQA-E-90108 |
| Yodogawa Plant (Japan) | Certificate number: EC99J2057 |
| Daikin Australia Pty. Ltd. | Certificate number: CEM20437 |

**Daikin Australia Pty Limited (ISO 9001)**
QEC 23256
May 12, 2006
Sydney, Brisbane, Adelaide, Melbourne, Newcastle, Townsville, Perth

**Daikin Australia Pty Limited (ISO 45001)**
OHS 20939 17
February 2021
Sydney

**Daikin Australia Pty Limited (ISO 14001)**
CEM 20437
October 27, 2006
Sydney, Brisbane, Adelaide, Melbourne, Perth

**Industrial System and Chiller Products Manufacturing Div**
(ISO 9001)
JQA-0495 May 16, 1994
(Yodogawa Plant and Kanaoka Factory and Kishiwada Factory)

**Daikin Europe N.V (ISO 9001)**
Lloyd 928589.1 June 2, 1993

**Daikin Industries (Thailand) Ltd**
JQA-1452 September 13, 2002
(ISO 9001)

CONTACT

DAIKIN

Daikin Australia Pty Limited ABN 62 000 172 967
For all Sales enquiries, email: sales@daikin.com.au
For Customer Service or Technical Support, call: 1300 368 300

Scan to learn more about Daikin Split Systems